




D100 IP20
LED spotlight range
Integral driver version

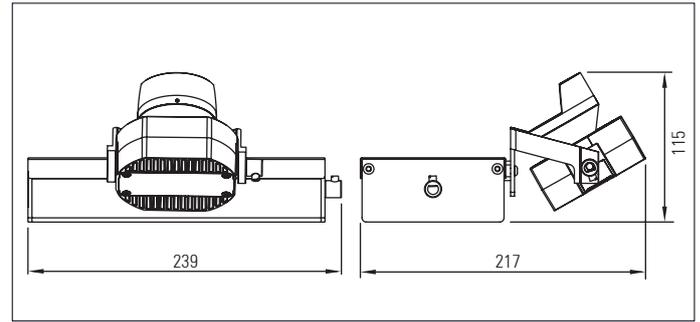


Double spotlight version:

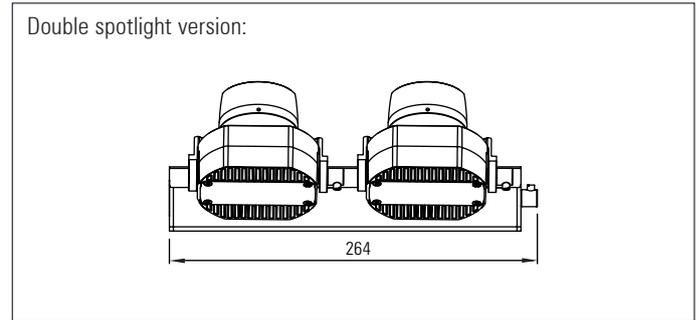

Triple spotlight version:

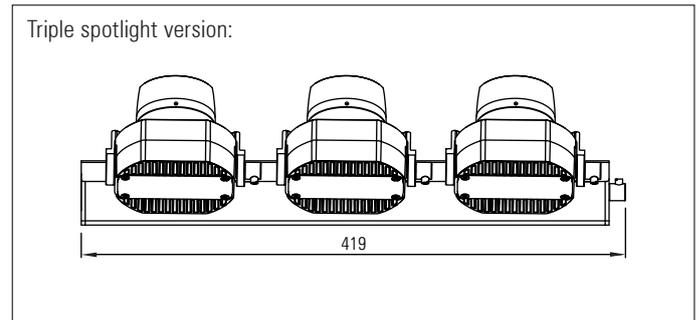

Anti glare snoot accessory:

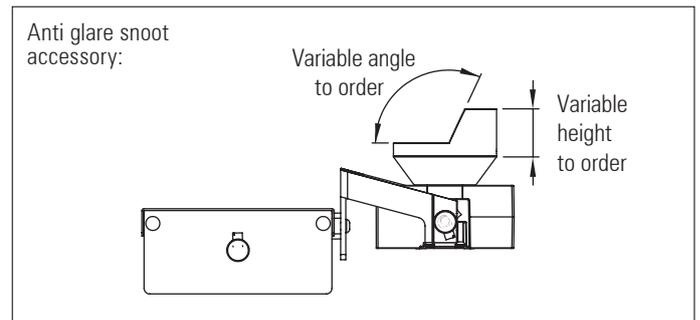

D100 IP20 Spotlight - Integral driver version

LED Spotlight with integral driver

The D100 spotlight range was developed for use in the relighting of Hereford Cathedral in conjunction with Light Perceptions.

Product description:

Each spotlight head - 10 Watt Citizen or Sharp COB

One, two or three spotlights per luminaire

A wide variety of anti glare, beam control and colour filter accessories are available

Various LED colour temperature and CRI options available

Fully lockable in both axes

230 V AC Input

Dimming options: 1 - 10V, DALI, DMX or phase

Satin black, satin white or any RAL colour finish

Product Code	IP	No. of spotlights	Colour Temp. (K)	CRI	Optics	Finish	Anti-glare snoot
D100 INTEGRAL DRIVER	20	1 2 3	27=2,700k 30=3,000k 40=4,000k 45=4,500k 50=5,000k	80 90	Citizen: 20° 24° 29° 36° 42° 48° Sharp: 17° 20° 29° 39° 45°	Black White Any RAL-colour	Height (mm): 20mm -increments of 5 mm up to-150mm Cut angle (°) 0° -increments of 5° up to-75°